


ANCHOR PATTERN SHACKLES

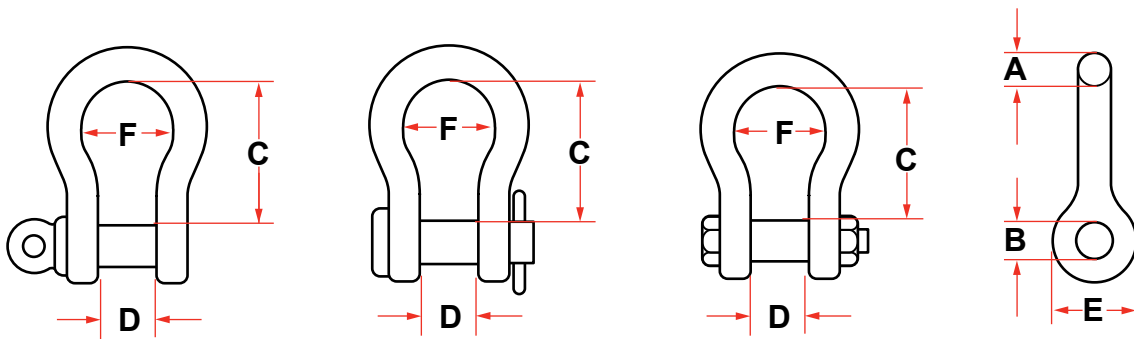


**HEAT-TREATED, DROP FORGED CARBON STEEL
ANCHOR SHACKLE: SCREW PIN, ROUND PIN, SAFETY BOLT PIN**

RATED LOAD TONS	DIMENSIONS (INCHES)						WEIGHT IN POUNDS	
	A	B	C	D	E	F	SCREW PIN OR ROUND PIN	SAFETY BOLT
1/3	3/16	1/4	7/8	3/8	9/16	19/32	0.05	
1/2	1/4	5/16	1-1/8	1/2	3/4	3/4	0.12	
3/4	5/16	3/8	1-1/4	9/16	7/8	1	0.18	
1	3/8	7/16	1-7/16	11/16	1	1-1/8	0.3	
1-1/2	7/16	1/2	1-11/16	3/4	1-1/8	1-1/4	0.5	
2	1/2	5/8	1-7/8	13/16	1-3/16	1-5/16	0.75	0.8
3-1/4	5/8	3/4	2-7/16	1-1/16	1-9/16	1-11/16	1.5	1.6
4-3/4	3/4	7/8	3	1-1/4	1-7/8	2	2.16	3.0
6-1/2	7/8	1	3-5/16	1-7/16	2-1/8	2-1/4	3.37	4.0
8-1/2	1	1-1/8	3-3/4	1-11/16	2-3/8	2-5/8	5.3	5.5
9-1/2	1-1/8	1-1/4	4-1/4	1-7/8	2-5/8	3	7.0	8.0
12	1-1/4	1-3/8	4-1/2	2	2-15/16	3-3/8	9.6	11.0
13-1/2	1-3/8	1-1/2	5-1/4	2-1/4	3-5/16	3-5/8	12.6	15.0
17	1-1/2	1-5/8	5-3/4	2-3/8	3-5/8	3-7/8	17.3	19.5
21	1-5/8	1-3/4	6-1/4	2-5/8	3-3/16	4-3/8	21.0	23.0
25	1-3/4	2	7	2-7/8	4-5/16	5	27.8	31.5
35	2	2-1/4	7-3/4	3-1/4	5	5-3/4	41.0	42.0
42	2-1/4	2-1/2	8-3/4	3-7/8	5-1/2	6-1/2	65.0	69.0
55	2-1/2	2-3/4	10	4-1/8	6	7-1/4	83.5	94.0
60	2-3/4	3	11-1/4	4-1/2	6-1/4	8	118.0	121.0
85	3	3-1/4	13	5	6-3/4	9	140.0	146.0
120	3-1/2	3-3/4	15	5-3/4	8-1/2	10-1/8	250.0	
150	4	4-1/4	17	6-1/2	9-3/8	10-1/2	360.0	
175	4-1/2	4-3/4	19	7-1/4	10	12-1/2	445.0	

Sizes 3/16" Thru 1" Available in Stainless Steel Safety Type
NOTES: Minimum breaking strength is six times rated working load.
Furnished in galvanized or self colored finish.

Pins are galvanized after threading.
Shackles can be furnished with complete traceability, proof test certificates, and serial number at slight additional charge.

CHAIN PATTERN SHACKLES

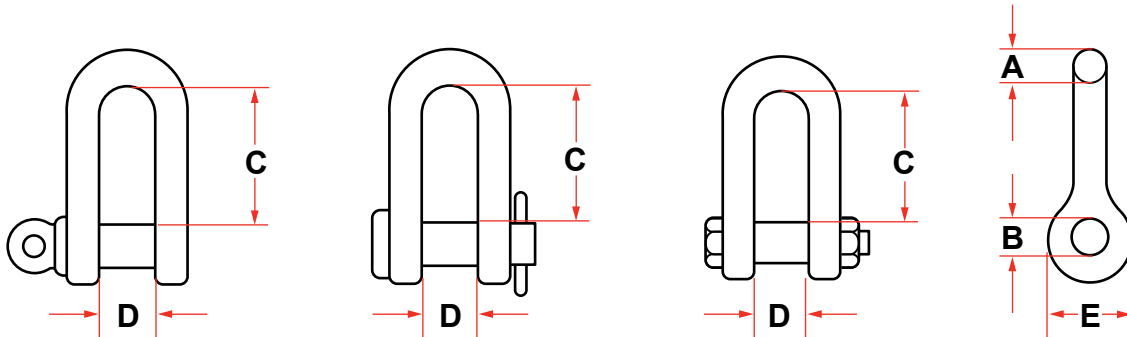

**HEAT-TREATED, DROP FORGED CARBON STEEL
CHAIN SHACKLE: SCREW PIN, ROUND PIN, SAFETY BOLT PIN**

RATED LOAD TONS	DIMENSIONS (INCHES)					WEIGHT IN POUNDS	
	A	B	C	D	E	SCREW PIN OR ROUND PIN	SAFETY BOLT
1/3	3/16	1/4	7/8	3/8	9/16	0.05	
1/2	1/4	5/16	1-1/8	1/2	3/4	0.1	
3/4	5/16	3/8	1-1/4	9/16	7/8	0.18	
1	3/8	7/16	1-7/16	11/16	1	0.25	
1-1/2	7/16	1/2	1-11/16	3/4	1-1/8	0.41	
2	1/2	5/8	1-7/8	13/16	1-3/16	0.61	0.8
3-1/4	5/8	3/4	2-7/16	1-1/16	1-9/16	1.2	1.4
4-3/4	3/4	7/8	3	1-1/4	1-7/8	2.12	2.5
6-1/2	7/8	1	3-5/16	1-7/16	2-1/8	3.28	3.8
8-1/2	1	1-1/8	3-3/4	1-11/16	2-3/8	4.6	5.5
9-1/2	1-1/8	1-1/4	4-1/4	1-7/8	2-5/8	6.3	7.5
12	1-1/4	1-3/8	4-1/2	2	2-15/16	9.25	10.8
13-1/2	1-3/8	1-1/2	5-1/4	2-1/4	3-5/16	12.19	14.3
17	1-1/2	1-5/8	5-3/4	2-3/8	3-5/8	16.15	19.0
21	1-5/8	1-3/4	6-1/4	2-5/8	3-13/16	21.0	23.0
25	1-3/4	2	7	2-7/8	4-5/16	27.0	30.5
35	2	2-1/4	7-3/4	3-1/4	5	39.5	45.0
42	2-1/4	2-1/2	8-3/4	3-7/8	5-1/2	65.0	69.0
55	2-1/2	2-3/4	10	4-1/8	6	72.0	82.0
60	2-3/4	3	11-1/4	4-1/2	6-1/4		98.0
85	3	3-1/4	13	5	6-3/4		135.0
120	3-1/2	3-3/4	15	5-3/4	8-1/2		187.0
150	4	4-1/4	17	6-1/2	9-3/8		360.0
175	4-1/2	4-3/4	19	7-1/4	10		445.0

Sizes 3/16" Thru 1" Available in Stainless Steel Safety Type
NOTES: Minimum breaking strength is six times rated working load.
Furnished in galvanized or self colored finish.

Pins are galvanized after threading.
Shackles can be furnished with complete traceability, proof test certificates,
and serial number at slight additional charge.