



DETACHABLE LINK PUNCHES

These punches are designed for the assembly and disassembly of detachable chain connecting links, kenter links, and anchor joining links. Sizes will vary for kenter and pear links made from steel, heat treated to 45-50 Rockwell C.

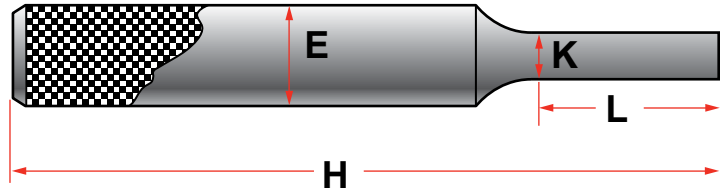

ASSEMBLING PUNCHES

PUNCH NO.	INCHES					
	LINK SIZE	E	K	H	L	HANDLE
P-1A	5/8 - 3/4	3/4	15/64	5	1-1/8	
P-2A	7/8 - 1	3/4	17/64	5	1-1/8	
P-3A	1-1/8 - 1-3/8	1	3/8	6	1-3/8	
P-4A	1-1/2 - 1-5/8	1	33/64	6-1/2	1-3/8	
P-5A	1-3/4 - 2	1	21/32	6-1/2	1-1/2	X
P-6A	2-1/8 - 2-3/8	1	51/64	6-1/2	1-5/8	X
P-7A	2-1/2 - 2-7/8	1-1/8	61/64	6-1/2	1-5/8	X
P-8A	3	1-1/4	1-9/64	7	1-3/4	X

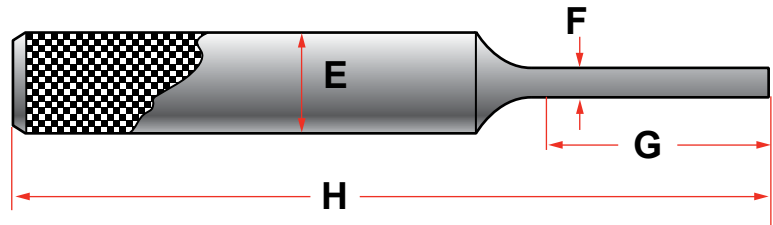

DISASSEMBLY PUNCHES

PUNCH NO.	INCHES					
	LINK SIZE	E	F	H	G	HANDLE
P-1D	5/8 - 3/4	3/4	13/64	5	1-1/4	
P-2D	7/8 - 1	3/4	15/64	5	1-1/2	
P-3D	1-1/8 - 1-3/8	1	5/16	6	2-1/2	
P-4D	1-1/2 - 1-5/8	1	15/32	6-1/2	2-7/8	
P-5D	1-3/4 - 2	1	9/16	6-1/2	3-1/4	X
P-6D	2-1/8 - 2-3/8	1	11/16	6-1/2	3-1/2	X
P-7D	2-1/2 - 2-7/8	1-1/8	13/16	6-1/2	3-1/2	X
P-8D	3	1-1/4	1	7	4	X

