


## CLOSED WEDGE SOCKETS


QUENCHED AND TEMPERED CAST STEEL

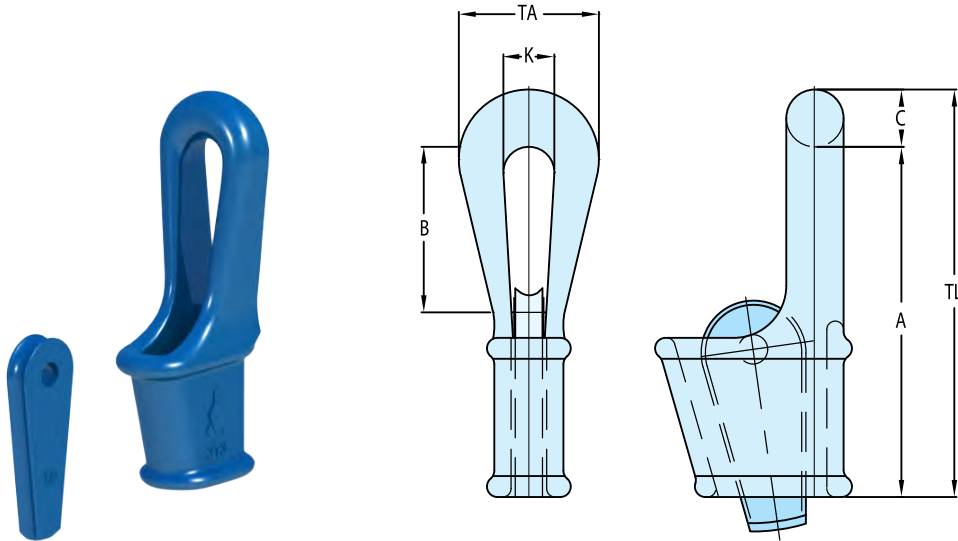

| MODEL NR. | MBL<br>(USTONS) | FOR WIRE Ø |             | DIMENSIONS (INCH) |          |         |         |          |          | WEIGHT<br>(LBS) |
|-----------|-----------------|------------|-------------|-------------------|----------|---------|---------|----------|----------|-----------------|
|           |                 | MM         | INCH        | A                 | B        | C       | K       | TA       | TL       |                 |
| CWS 303   | 44              | 18-19      | ¾           | 8 11/16           | 3 15/16  | 1 5/16  | 1 1/16  | 3 5/16   | 10       | 15              |
| CWS 304   | 61              | 20-22      | 7/8         | 8 7/8             | 4 15/16  | 1 5/8   | 1 7/8   | 4 5/16   | 10 ½     | 20              |
| CWS 305   | 83              | 24-26      | 1           | 11 7/16           | 5 ½      | 1 15/16 | 2 3/16  | 4 15/16  | 13 3/8   | 31              |
| CWS 306   | 99              | 27-29      | 1 ½         | 12 13/16          | 5 11/16  | 2 3/8   | 2 3/4   | 6        | 15 3/16  | 49              |
| CWS 307   | 121             | 30-32      | 1 ¼         | 14 3/16           | 6 5/16   | 2 11/16 | 2 15/16 | 6 ½      | 16 7/8   | 66              |
| CWS 308   | 138             | 34-36      | 1 3/8       | 15 3/4            | 7 1/16   | 2 11/16 | 2 15/16 | 6 ½      | 18 7/16  | 84              |
| CWS 309   | 165             | 37-39      | 1 ½         | 19 11/16          | 9 7/16   | 2 13/16 | 3 1/8   | 7 5/16   | 22 ½     | 108             |
| CWS 310   | 187             | 40-42      | 1 5/8       | 23 5/8            | 12 3/16  | 3 1/8   | 3 9/16  | 8 ¼      | 26 3/4   | 143             |
| CWS 311   | 248             | 43-48      | 1 ¾ - 1 7/8 | 25 3/16           | 12 13/16 | 3 9/16  | 3 15/16 | 8 7/8    | 28 ¾     | 220             |
| CWS 312   | 309             | 49-52      | 2           | 28 3/8            | 14 ¾     | 3 15/16 | 4 1/16  | 9 5/8    | 32 5/16  | 331             |
| CWS 313   | 397             | 54-58      | 2 ¼         | 30 ½              | 15 ¾     | 4 9/16  | 4 ¾     | 10 7/16  | 34 13/16 | 353             |
| CWS 314   | 468             | 61-64      | 2 ½         | 35 7/16           | 18 ½     | 4 15/16 | 5 1/8   | 11 13/16 | 40 3/8   | 507             |
| CWS 315   | 507             | 72-76      | 3           | 39 3/8            | 16 13/16 | 5 1/8   | 5 7/8   | 13       | 44 ½     | 794             |
| CWS 316   | 689             | 81-86      | 3 ¼ - 3 3/8 | 44 5/16           | 21 5/8   | 5 5/16  | 6 ½     | 14 3/16  | 49 5/8   | 937             |

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.  
Meets performance requirements of API 2C.



**ROPEBLOCK**