


KENTER JOINING SHACKLE (METRIC)

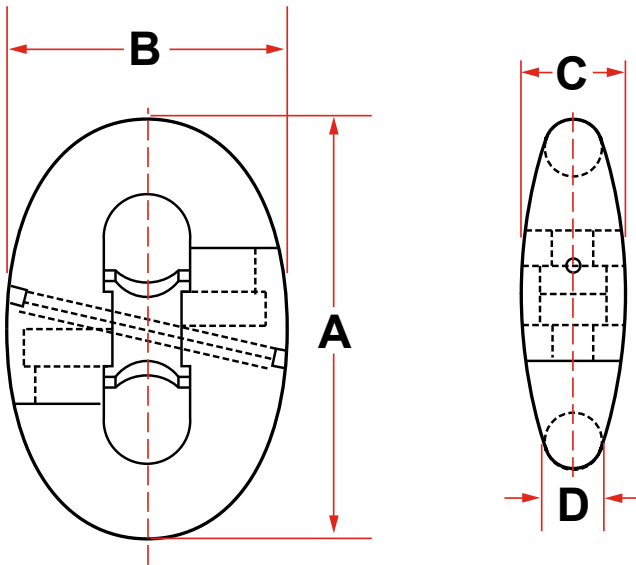


NOMINAL DIAMETER (D)	A	B	C	WEIGHT
mm	mm	mm	mm	kg
12.5	75	53	19	0.45
14	84	59	21	0.6
16	96	67	24	0.65
17.5	105	74	27	0.88
19	114	80	29	1.13
20.5	123	86	31	1.36
22	132	92	33	1.64
24	144	101	36	2.13
26	156	109	40	2.58
28	168	118	43	3.3
30	180	126	46	4.15
32	192	134	49	5.06
34	204	143	52	6.01
36	216	151	55	6.89
38	228	160	58	8.4
40	240	168	61	9.63
42	252	176	64	11
44	264	185	67	12.45
46	276	193	70	14.1
48	288	202	73	16.7
50	300	210	76	19
52	312	218	79	20.3
54	324	227	82	23.7
56	336	235	85	26.7

Continued

NOMINAL DIAMETER (D)	A	B	C	WEIGHT
mm	mm	mm	mm	kg
58	348	244	88	27.2
60	360	252	91	27.7
62	372	260	94	35
64	384	269	97	38.4
66	396	277	100	42.3
68	408	286	103	46
70	420	294	106	48.7
73	438	307	111	53
76	456	319	116	60.7
78	468	328	119	65.5
81	486	340	123	75
84	504	353	128	90
87	522	365	132	96
90	540	378	137	108
92	552	386	140	114
95	570	399	144	128
97	582	407	147	133
100	600	420	152	146
102	612	428	155	158
105	630	441	160	160
107	642	449	163	180
111	666	466	169	198
114	684	479	173	204

Loads match that of same diameter SLAC.

KENTER JOINING SHACKLE (IMPERIAL)

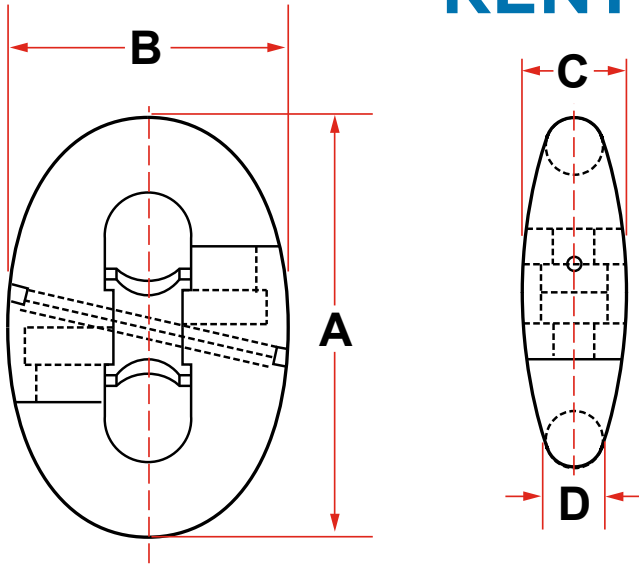


NOMINAL DIAMETER (D)	A	B	C	WEIGHT
In	In	In	In	Lbs
1/2	3.0	2.1	0.8	1.0
9/16	3.4	2.4	0.9	1.3
5/8	3.8	2.6	1.0	1.4
11/16	4.1	2.9	1.0	1.9
3/4	4.5	3.2	1.1	2.4
13/16	4.9	3.4	1.2	2.9
7/8	5.3	3.7	1.3	3.5
15/16	5.6	3.9	1.4	4.6
1	6.0	4.2	1.5	5.7
1 1/16	6.4	4.5	1.6	6.6
1 1/8	6.8	4.7	1.7	7.7
1 3/16	7.1	5.0	1.8	9.2
1 1/4	7.5	5.3	1.9	10.6
1 5/16	7.9	5.5	2.0	12.8
1 3/8	8.3	5.8	2.1	14.3
1 7/16	8.6	6.0	2.2	16.5
1 1/2	9.0	6.3	2.3	18.5
1 9/16	9.4	6.6	2.4	21.0
1 5/8	9.8	6.8	2.5	24.2
1 11/16	10.1	7.1	2.6	27.1
1 3/4	10.5	7.4	2.7	29.8
1 13/16	10.9	7.6	2.8	33.0
1 7/8	11.3	7.9	2.9	36.4
1 15/16	11.6	8.1	2.9	39.7
2	12.0	8.4	3.0	45.2
2 1/16	12.4	8.7	3.1	49.2
2 1/8	12.8	8.9	3.2	53.4
2 3/16	13.1	9.2	3.3	58.0
2 1/4	13.5	9.5	3.4	62.8
2 5/16	13.9	9.7	3.5	67.9

Continued

NOMINAL DIAMETER (D)	A	B	C	WEIGHT
In	In	In	In	Lbs
2 3/8	14.3	10.0	3.6	75.0
2 7/16	14.6	10.2	3.7	80.9
2 1/2	15.0	10.5	3.8	86.8
2 9/16	15.4	10.8	3.9	93.3
2 5/8	15.8	11.0	4.0	99.9
2 11/16	16.1	11.3	4.1	107
2 3/4	16.5	11.6	4.2	114
2 13/16	16.9	11.8	4.3	124
2 7/8	17.3	12.1	4.4	132
2 15/16	17.6	12.3	4.5	140
3	18.0	12.6	4.6	149
3 1/16	18.4	12.9	4.7	158
3 1/8	18.8	13.1	4.8	170
3 3/16	19.1	13.4	4.8	180
3 1/4	19.5	13.7	4.9	191
3 5/16	19.9	13.9	5.0	201
3 3/8	20.3	14.2	5.1	215
3 7/16	20.6	14.4	5.2	227
3 1/2	21.0	14.7	5.3	238
3 9/16	21.4	15.0	5.4	251
3 5/8	21.8	15.2	5.5	262
3 3/4	22.5	15.8	5.7	289
3 7/8	23.3	16.3	5.9	324
3 15/16	23.6	16.5	6.0	340
4	24.0	16.8	6.1	355
4 1/8	24.0	16.8	6.1	355
4 1/4	25.5	17.9	6.5	428
4 3/8	26.3	18.4	6.7	465
4 1/2	27.0	18.9	6.8	509

Loads match that of same diameter SLAC.

KENTER JOINING SHACKLE GRADE R4

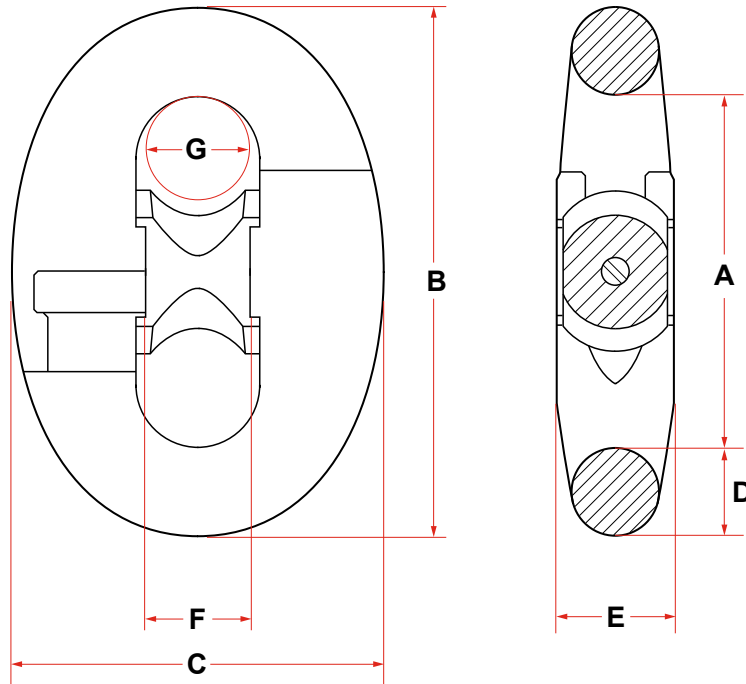

CHAIN SIZE SIZE	PL (kN)	BL (kN)	DIMENSIONS (MM)							WEIGHT (KG)
			A	B	C	D	E	F	G	
70	4064	5156	280	420	294	70	106	81	77	58
76	4731	6001	304	456	319	76	116	87	84	67
84	5682	7208	336	504	353	84	128	97	92	88
89	6310	8004	356	534	374	89	135	102	98	99
95	7096	9001	380	570	399	95	144	109	105	150
102	8054	10217	408	612	428	102	155	117	112	168
105	8478	10754	420	630	441	105	160	121	116	175
108	8909	11301	432	648	454	108	164	124	119	193
114	9791	12420	456	684	479	114	173	131	125	205
117	10242	12993	468	702	491	117	178	135	129	219
120	10700	13573	480	720	504	120	182	138	132	241
127	11789	14955	508	762	533	127	193	146	140	280
133	12746	16169	532	798	559	133	202	153	146	322
146	14881	18877	584	876	613	146	222	168	161	425
152	15890	20156	608	912	638	152	231	175	167	480

Tolerances on Forged Surfaces +/- 2.5% - Tolerances on Machined Surfaces + / - 1% - Tolerances on Crown Area +5% / -0%