


Material : Alloy steel
Safety factor : ≤ 12914000 - 400 ton: 5 times
 > 12916000 - 400 ton: 4 times
Standards : Generally according to EN 1677-4
Finish : Painted
Temperature range : ≤ 12914000 - 400 ton, -4°F up to +392°F
 > 12916000 - 400 ton, -40°F up to +392°F, Polar Rated
Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

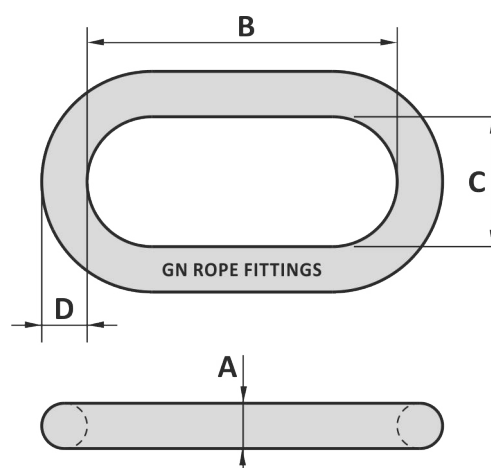


Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	Weight lbs
12220000	5	25	$\frac{7}{8}$	$6 \frac{5}{16}$	$3 \frac{9}{16}$	$\frac{7}{8}$	3.3
12260000	8	40	$1 \frac{1}{32}$	$7 \frac{3}{32}$	$3 \frac{15}{16}$	$1 \frac{1}{32}$	5.1
12320000	10	50	$1 \frac{1}{4}$	$7 \frac{7}{8}$	$4 \frac{5}{16}$	$1 \frac{1}{4}$	8.6
12360000	16	80	$1 \frac{13}{32}$	$10 \frac{1}{4}$	$5 \frac{1}{2}$	$1 \frac{13}{32}$	14
12450000	26	130	$1 \frac{25}{32}$	$13 \frac{3}{4}$	$7 \frac{3}{32}$	$1 \frac{25}{32}$	29
12510000	36	180	2	$13 \frac{25}{32}$	$7 \frac{15}{32}$	2	37
12570000	47	235	$2 \frac{1}{4}$	$15 \frac{3}{4}$	$7 \frac{7}{8}$	$2 \frac{1}{4}$	53
12630000	58	290	$2 \frac{15}{32}$	$16 \frac{15}{16}$	$8 \frac{21}{32}$	$2 \frac{15}{32}$	71
12720000	84	420	$2 \frac{27}{32}$	$18 \frac{1}{8}$	$9 \frac{27}{32}$	$2 \frac{27}{32}$	99
12800000	105	525	$3 \frac{5}{32}$	$17 \frac{23}{32}$	$9 \frac{27}{32}$	$3 \frac{5}{32}$	123
12900000	131	655	$3 \frac{9}{16}$	$18 \frac{1}{8}$	$11 \frac{13}{16}$	$3 \frac{9}{16}$	170
12910000	157	785	$3 \frac{15}{16}$	$19 \frac{1}{16}$	$11 \frac{13}{16}$	$3 \frac{15}{16}$	223
12912500	250	1250	$4 \frac{17}{32}$	$23 \frac{3}{8}$	$15 \frac{3}{4}$	$4 \frac{17}{32}$	359
12912510	300	1500	$4 \frac{17}{32}$	$23 \frac{3}{8}$	$11 \frac{13}{16}$	$4 \frac{17}{32}$	340
12913500	400	2000	$4 \frac{17}{32}$	$27 \frac{9}{16}$	$9 \frac{27}{32}$	$4 \frac{17}{32}$	366
12914000	400	2000	$4 \frac{17}{32}$	$19 \frac{9}{32}$	$9 \frac{27}{32}$	$4 \frac{17}{32}$	291
12916000	400	1600	$6 \frac{3}{32}$	$31 \frac{1}{2}$	$15 \frac{3}{4}$	$8 \frac{1}{16}$	1058
12917000	500	2000	$6 \frac{7}{8}$	$31 \frac{1}{2}$	$15 \frac{3}{4}$	$8 \frac{21}{32}$	1329
12918000	600	2400	$7 \frac{11}{16}$	$31 \frac{1}{2}$	$15 \frac{3}{4}$	$9 \frac{1}{16}$	1614
12918100	700	2800	$7 \frac{7}{8}$	$33 \frac{15}{32}$	$15 \frac{3}{4}$	$9 \frac{1}{4}$	1753
12918200	800	3200	$8 \frac{1}{4}$	$33 \frac{15}{32}$	$15 \frac{3}{4}$	$9 \frac{21}{32}$	1942
12918300	900	3600	$9 \frac{1}{16}$	$35 \frac{7}{16}$	$15 \frac{3}{4}$	$10 \frac{5}{8}$	2467
12918400	1000	4000	$9 \frac{7}{16}$	$35 \frac{7}{16}$	$15 \frac{3}{4}$	$11 \frac{1}{32}$	2703
12918500	1250	5000	$10 \frac{1}{4}$	$39 \frac{3}{8}$	$15 \frac{3}{4}$	$12 \frac{3}{16}$	3481
12918600	1500	6000	$10 \frac{3}{4}$	$39 \frac{3}{8}$	$15 \frac{3}{4}$	$12 \frac{19}{32}$	3774

Tolerance: Forged parts ± 5%

14-06-2016

Material : Alloy steel
 Safety factor : ≤ 12914000 - 400 ton: 5 times
 : > 12916000 - 400 ton: 4 times
 Standards : Generally according to EN 1677-4
 Finish : Painted
 Temperature range : ≤ 12914000 - 400 ton, -20°C up to +200°C
 : > 12916000 - 400 ton, -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request


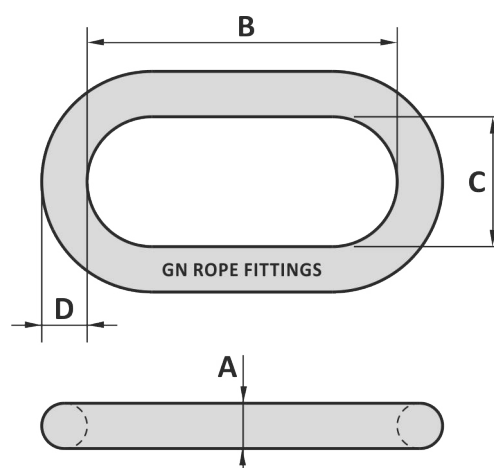


Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	Weight kg
12220000	5	25	22	160	90	22	1.5
12260000	8	40	26	180	100	26	2.3
12320000	10	50	32	200	110	32	3.9
12360000	16	80	36	260	140	36	6.3
12450000	26	130	45	340	180	45	13
12510000	36	180	51	350	190	51	17
12570000	47	235	57	400	200	57	24
12630000	58	290	63	430	220	63	32
12720000	84	420	72	460	250	72	45
12800000	105	525	80	450	250	80	56
12900000	131	655	90	460	300	90	77
12910000	157	785	100	500	300	100	101
12912500	250	1250	115	600	400	115	163
12912510	300	1500	115	600	300	115	154
12913500	400	2000	115	700	250	115	166
12914000	400	2000	115	490	250	115	132
12916000	400	1600	155	800	400	205	480
12917000	500	2000	175	800	400	220	603
12918000	600	2400	195	800	400	230	732
12918100	700	2800	200	850	400	235	795
12918200	800	3200	210	850	400	245	881
12918300	900	3600	230	900	400	270	1119
12918400	1000	4000	240	900	400	280	1226
12918500	1250	5000	260	1000	400	310	1579
12918600	1500	6000	270	1000	400	320	1712

Tolerance: Forged parts $\pm 5\%$

14-06-2016

Material : Alloy steel
 Safety factor : ≤ 300 ton: 5 times
 > 300 ton: 4 times
 Standards : Generally according to EN 1677-4
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

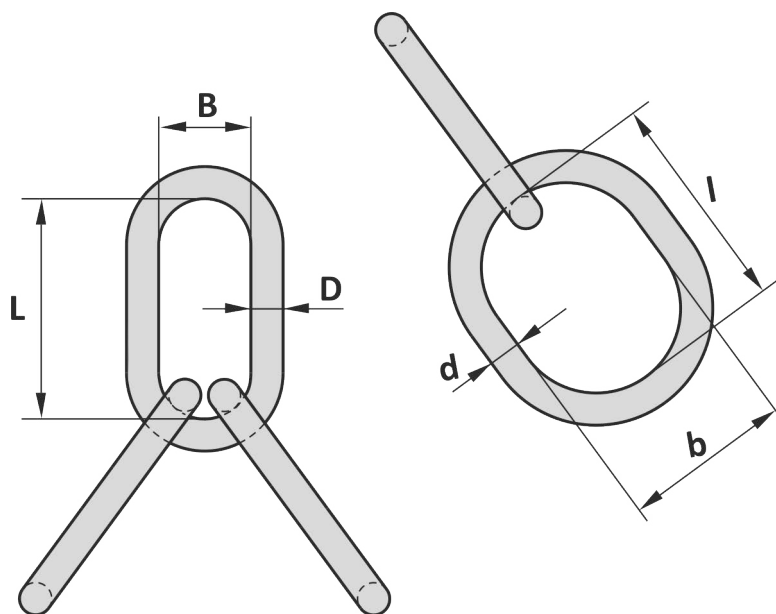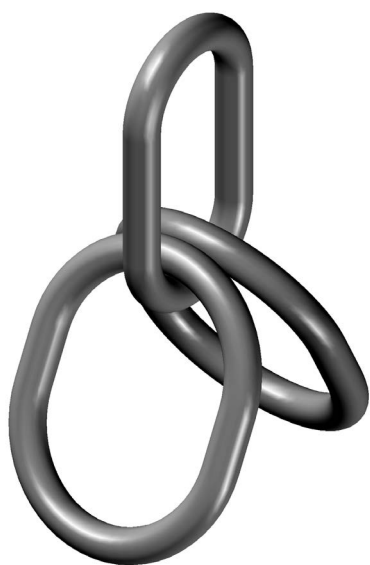

Art. No.	WLL ton	MBL ton	D mm	L mm	B mm	d mm	l mm	b mm	Weight kg
58000070	70	350	68	460	220	68	430	300	117
58000100	100	500	80	500	250	80	460	330	178
58000125	125	625	90	560	270	90	500	330	249
58000175	175	875	100	600	270	100	560	330	330
58000250	250	1250	115	600	400	115	600	400	505
58000300	300	1500	115	600	300	115	600	400	492
58000350	350	1400	115	600	270	115	600	400	480
58000400	400	1600	115	600	270	115	600	300	460

Tolerance: Forged parts ± 5%


Art. No.	WLL ton	MBL ton	D inch	L inch	B inch	d inch	l inch	b inch	Weight lbs
58000070	70	350	2 11/16	18 1/8	8 23/32	2 11/16	16 15/16	11 13/16	258
58000100	100	500	3 5/32	19 11/16	9 27/32	3 5/32	18 1/8	13	392
58000125	125	625	3 9/16	22 1/16	10 5/8	3 9/16	19 11/16	13	549
58000175	175	875	3 15/16	23 5/8	10 5/8	3 15/16	22 1/16	13	728
58000250	250	1250	4 17/32	23 3/8	15 3/4	4 17/32	23 5/8	15 3/4	1113
58000300	300	1500	4 17/32	23 3/8	11 13/16	4 17/32	23 5/8	15 3/4	1085
58000350	350	1400	4 17/32	23 3/8	10 5/8	4 17/32	23 5/8	15 3/4	1058
58000400	400	1600	4 17/32	23 3/8	10 5/8	4 17/32	23 5/8	11 13/16	1014

Tolerance: Forged parts ± 5%

18-03-2016

Material : Alloy steel
 Hardness less than 35 HRC / 328 HB
 Yield strength less than 950 MPa
 Safety factor : 4 times
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

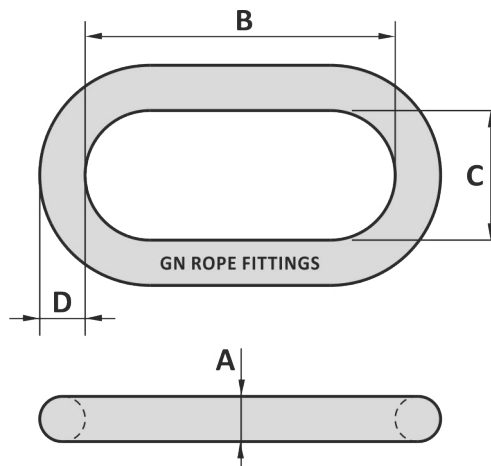


Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	Weight kg
12910055	55	220	65	400	200	80	39
12910085	85	340	85	450	250	100	76
12910125	125	500	95	450	250	110	95
12910150	150	600	115	450	300	130	153
12910200	200	800	125	500	300	145	198
12910250	250	1000	135	600	300	155	257
12910300	300	1200	145	600	300	175	312
12916000	400	1600	155	800	400	205	480
12917000	500	2000	175	800	400	220	603
12918000	600	2400	195	800	400	230	732
12918100	700	2800	200	850	400	235	795
12918200	800	3200	210	850	400	245	881
12918300	900	3600	230	900	400	270	1119
12918400	1000	4000	240	900	400	280	1226
12918500	1250	5000	260	1000	400	310	1579
12918600	1500	6000	270	1000	400	320	1712

Tolerance: Forged parts ± 5%

Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	Weight lbs
12910055	55	220	2 9/16	15 3/4	7 7/8	3 5/32	86
12910085	85	340	3 11/32	17 23/32	9 27/32	3 15/16	168
12910125	125	500	3 3/4	17 23/32	9 27/32	4 5/16	209
12910150	150	600	4 17/32	17 23/32	11 13/16	5 1/8	337
12910200	200	800	4 15/16	19 1/16	11 13/16	5 23/32	437
12910250	250	1000	5 3/16	23 3/8	11 13/16	6 3/32	567
12910300	300	1200	5 23/32	23 3/8	11 13/16	6 7/8	688
12916000	400	1600	6 3/32	31 1/2	15 3/4	8 1/16	1058
12917000	500	2000	6 7/8	31 1/2	15 3/4	8 21/32	1329
12918000	600	2400	7 11/16	31 1/2	15 3/4	9 1/16	1614
12918100	700	2800	7 7/8	33 15/32	15 3/4	9 1/4	1753
12918200	800	3200	8 1/4	33 15/32	15 3/4	9 21/32	1942
12918300	900	3600	9 1/16	35 7/16	15 3/4	10 5/8	2467
12918400	1000	4000	9 7/16	35 7/16	15 3/4	11 1/32	2703
12918500	1250	5000	10 1/4	39 3/8	15 3/4	12 1/16	3481
12918600	1500	6000	10 3/4	39 3/8	15 3/4	12 19/32	3774

Tolerance: Forged parts ± 5%

ALLOY MASTER LINK

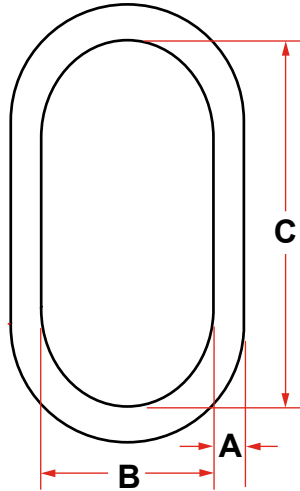

- Quenched & Tempered Alloy Steel
- Unless noted otherwise, each link is individually proof tested to values shown on the certificate. Proof tested according to ASTM A952 to avoid localized point loading.
- Each link is shipped with a proof test certificate.
- Sizes 2" and under are drop forged. Sizes over 2" are welded and magnetic particle inspected.

Never Exceed Working Load Limit.

SIZE A (INCHES)	WEIGHT (LBS.)			DIMENSIONS (INCHES)	
	WORKING LOAD LIMIT	PROOF LOAD	WEIGHT EACH	B	C
1/2	7000	14000	0.82	2.50	5.00
5/8	9000	18000	1.52	3.00	6.00
3/4	12300	24600	2.07	2.75	5.50
1	24360	48700	4.85	3.50	7.00
1-1/4	36200	72400	9.57	4.38	8.75
1-1/2	54300	113200	16.22	5.25	10.50
1-3/4	84900	169800	25.22	6.00	12.00
2	102600	205200	37.04	7.00	14.00
2-1/4	143100	289200	54.10	8.00	16.00
2-1/2	160000	320000	67.75	8.00	16.00
2-3/4	216900	433800	87.70	9.50	16.00
3	228000	456000	115.00	9.00	18.00
3-1/4	262200	524400	145.00	10.00	20.00
3-1/2	279000	558000	200.00	12.00	24.00
3-3/4	336000	672000	198.00	10.00	20.00
4	373000	746000	228.00	10.00	20.00
4-1/4	354000	708000	302.00	12.00	24.00
4-1/2	360000	720000	345.00	14.00	28.00
4-3/4	389000	778000	436.00	14.00	28.00
5	395000	790000	516.00	15.00	30.00