

LARGE LIGHT-READY BUOYS AND CHANNEL MARKERS



FEATURES

- Easy reconditioning of weather-worn buoys with excellent adhesion of restoration materials.
- Excellent stability and visibility
- Tough ABS exteriors
- Completely urethane foam filled
- Ultraviolet inhibited
- Photo electric cell operated

Model B2460L* B2460LG	Model B1428NSWL		Model B2460L* B2460LG	Model B2460L* B2460LG
24"	14"	Can diameter	14"	14"
60"	30"	Can height	30"	30"
-	28"	Float collar diameter	28"	28"
116"	54"	Overall height	96"	54"
48"	42"	Exp. w/light & batgteries	37"	42"
59"	10"	Draft	51"	7"
780 lbs.	310 lbs.	Submerged buoyancy	310 lbs.	280 lbs.
240 lbs.	117 lbs.	Net Weight	135 lbs.	115 lbs.
330 lbs.	135 lbs.	Shippine weight	145 lbs.	135 lbs.



Lights not included. Order separately.

*Standard bands, symbols and messages included.

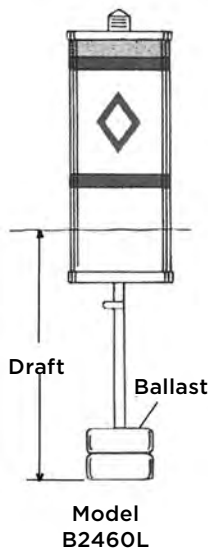


OPTIONS

- Internal radar reflectors
- Non-standard messages
- Agency and name identification
- Hi-intenisty bands and symbols
- Black and white or red and white centerline markers

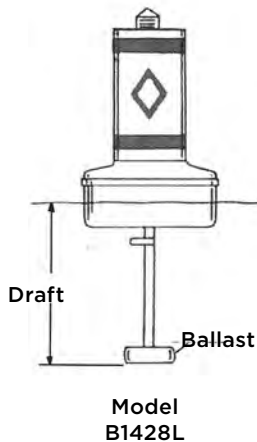

Internal ballast types are ideal for still, shallow and deep water.

REGULATORY BUOYS • ABS TYPE - 9" DIA.

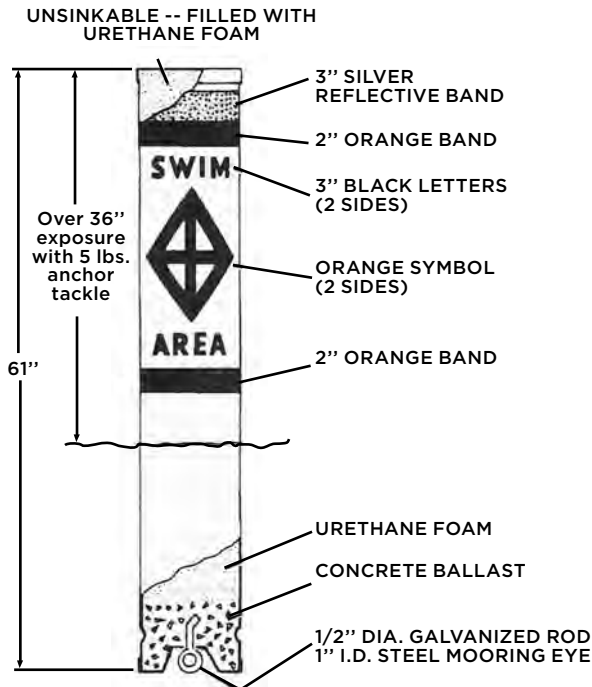

Approved and universally used by local, state and federal agencies to ensure water safety. Ideal for private applications.

MODEL B1147R

Includes choice of standard symbols and messages

FEATURES

- Easy reconditioning of weather-worn buoys with excellent adhesion of restoration materials.
- 9" diameter, white seamless, tough ABS plastic exterior.
- Will not rust, chip or peel. Ultraviolet inhibited.
- Completely urethane foam filled. Virtually unsinkable.
- 3" wide reflective band at top provides excellent night time visibility.
- Self-righting without tackle.
- Recessed cap allows buoy to stand upright.
- Heavy steel galvanized anchoring eye cast in an internal concrete ballast.
- Symbols and messages impregnated into buoy surface.

AVAILABLE OPTIONS

- Internal radar reflectors
- Pickup eye built into top
- Stainless steel anchoring eye for salt water applicators
- Agency or name identification
- Cone cap top
- Special non-standard messages
- 1/2" Pvc pipe thru for float line applications
- Lighted buoys

MODEL B1147R

Specify desired symbols and messages when ordering.


Submerged buoyancy 84 lbs.

Net weight 49 lbs.

Shipping weight 56 lbs.

STANDARD INLAND WATERWAY SYMBOLS AND MESSAGES	CONTROLLED AREA SYMBOL	HAZARD WARNING SYMBOL	RESTRICTED AREA SYMBOL	INFORMATION SYMBOL
	<p>12"</p> <p>2" BAND WIDTH</p>	<p>14"</p> <p>11"</p> <p>2" BAND WIDTH</p>	<p>14"</p> <p>11"</p> <p>2" BAND WIDTH</p>	<p>14"</p> <p>11"</p> <p>2" BAND WIDTH</p>
<p>SPECIAL MESSAGES ARE AVAILABLE.</p> <p>REQUEST A QUOTATION</p>	<p>STANDARD MESSAGES</p> <p>SLOW 5 MPH</p> <p>SLOW NO WAKE</p> <p>SKI AREA</p> <p>NO SKI</p> <p>SLOW 10 MPH</p> <p>SPEED ZONE</p> <p>NO WAKE IDLE</p> <p>SPEED</p>	<p>STANDARD MESSAGES</p> <p>ROCK</p> <p>DANGER</p> <p>RAPIDS</p> <p>SHOAL</p> <p>STUMP</p> <p>SHALLOW AREA</p> <p>HAZARD AREA</p> <p>DANGER DAM</p>	<p>STANDARD MESSAGES</p> <p>SWIM AREA</p> <p>KEEP OUT</p> <p>NO BOATS</p> <p>BOATS KEEP OUT</p> <p>CLOSED AREA</p> <p>NO BOATING</p> <p>DANGER DAM</p>	<p>STANDARD MESSAGES</p> <p>REST ROOM 1 MILE</p> <p>STATE PARK</p> <p>AHEAD</p> <p>MARINA</p> <p>ENTRANCE</p> <p>FISH ATTRACTOR</p>

SPAR BUOY • ABS TYPE - 5" DIA.

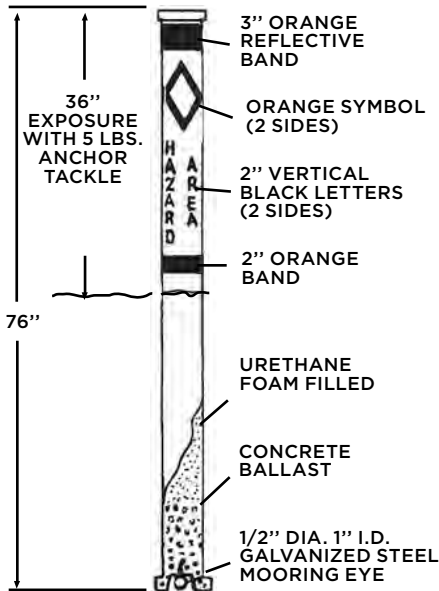

Lightweight, easy to handle - minimum anchor weight allows easy removal.

FEATURES

- Easy reconditioning of weather-worn buoys with excellent adhesion of restoration materials.
- 5" diameter, white, seamless, tough ABS plastic exterior. Ultraviolet inhibited, will not rust, chip or peel.
- Urethane foam filled. Virtually unsinkable.
- 3" wide reflective band at top provides excellent night visibility.
- Self-righting without tackle.
- Recessed cap allows buoy to stand upright.
- Heavy steel galvanized anchoring eye cast in an internal concrete ballast.
- In waterway making symbols with standard messages.

AVAILABLE OPTIONS:

- Internal radar reflectors
- Stainless steel anchoring eye for salt water applicators
- Special non-standard messages
- Agency or name identification

MODEL B576S



Standard symbols and messages included in price. Specify desired symbols and messages when ordering.

Submerged buoyancy 30 lbs.
Net weight 24 lbs.
Shipping weight 28 lbs.

STANDARD SYMBOLS*




*Sized for 5" Spar Buoys



CAN BUOY • ABS TYPE -- 12" DIA.

HANGING CAN BUOY SYSTEM

- Easy to recondition when necessary.
- Excellent adhesion of reconditioning materials.
- Excellent visibility.
- 12" diameter white ABS plastic exterior will not rust, chip or peel.
- Ultraviolet inhibited.
- Completely urethane foam filled.
- 2" orange reflective band at top and bottom provides excellent night time visibility.
- 3/8" galvanized attachment eyebolt.
- Choice of inland waterway marking symbols and standard messages. (2 sets).
- Special non-standard messages available.
- Cable and attaching hardware available.

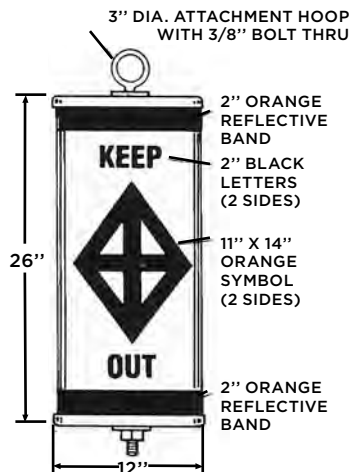


MODEL B1226

Net weight 12 lbs.
Shipping weight 18 lbs.

BUOYS ARE SUSPENDED FROM ABOVE

Excellent for short spans, swift water and areas with minimum public use.

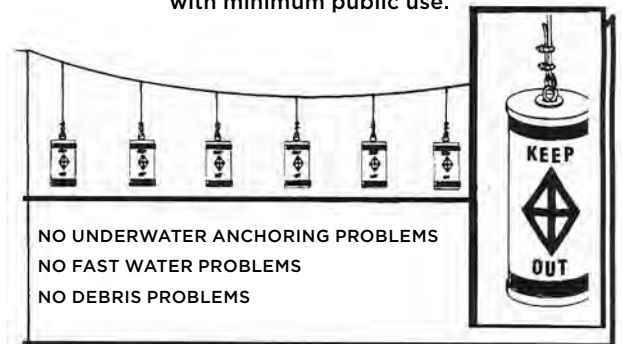

NOTE: The design and selection of a mooring system should be by a qualified professional engineer who is familiar with the specific application and local conditions. The illustrations shown are provided for informational purposes and are not intended to be suggested designs. Anchor assumes no responsibility for any mooring system based upon these illustrations.

OCEAN GUARD PENDANT BUOYS



BUOY MODEL	BUOYANCY NET		BUOY WEIGHT		DIAMETER OVERALL		BUOY LENGTH		HEIGHT OVERALL		WORKING LOAD	
	LBS	KG	LBS	KG	FT	M	FT	M	FT	M	LBS	TONS
PB-25	5,511	2,500	1,223	555	4.5	1.4	6.8	2.1	7.3	2.2	150,000	68
PB-50	11,023	5,000	2,123	963	6.0	1.8	7.2	2.2	8.7	2.7	150,000	68
PB-75	16,534	7,500	3,184	1,444	6.5	2.0	9.2	2.8	9.2	2.8	150,000	68
PB-100	22,046	10,000	2,735	1,241	6.5	2.0	11.0	3.4	9.3	2.8	150,000	68
PB-150	33,069	15,000	4,020	1,823	8.0	2.4	11.5	3.5	10.9	3.3	150,000	68
PB-200	44,092	20,000	4,922	2,233	8.5	2.6	13.5	4.1	11.5	3.5	200,000	91
PB-250	55,115	25,000	5,827	2,643	9.0	2.7	15.0	4.6	11.8	3.6	200,000	91
PB-300	66,138	30,000	6,688	3,034	9.5	2.9	16.0	4.9	12.8	3.9	200,000	91
PB-350	77,160	35,000	10,581	4,800	10.3	3.1	16.8	5.1	14.5	4.4	250,000	114
PB-400	88,183	40,000	11,449	5,193	10.5	3.2	18.0	5.5	16.3	5.0	250,000	114

* Actual values for above sizes may vary +/- 15% due to variations in materials and tolerances.


OCEAN GUARD MODULAR ANCHOR PENDANT BUOYS



BUOY MODEL	BUOYANCY NET		NUMBER OF MODULES	DIAMETER OVERALL		THROUGH PIPE DIAMETER	
	LBS	KG		FT	M	IN	MM
MAPB2-4	8,818	4,000	2	6.6	2.0	6.0	152
MAPB4-8	17,637	8,000	4	6.6	2.0	6.0	152
MAPB2-8	17,637	8,000	2	7.5	2.3	6.0	152
MAPB4-16	35,273	16,000	4	7.5	2.3	6.0	152
MAPB2-11	24,250	11,000	2	9.8	3.0	8.0	203
MAPB4-22	48,501	22,000	4	9.8	3.0	8.0	203
MAPB2-17	37,478	17,000	2	10.5	3.2	10.0	254
MAPB4-34	74,956	34,000	4	10.5	3.2	10.0	254
MAPB2-23	50,705	23,000	2	10.5	3.2	10.0	254
MAPB4-46	101,411	46,000	4	10.5	3.2	10.0	254

* Actual values for above sizes may vary +/- 15% due to variations in materials and tolerances.


OCEAN GUARD OCEANOGRAPHIC BUOYS



BUOY MODEL	BUOYANCY NET		FLOTATION WEIGHT		TOTAL WEIGHT		DIAMETER OVERALL		DIAMETER INTERNAL		FLOTATION HEIGHT		TOWER HEIGHT	
	LBS	KG	LBS	KG	LBS	KG	FT	M	FT	M	FT	M	FT	M
OG-10	2,205	1,000	60	27	513	233	5.4	1.6	2.2	0.7	2.3	0.7	5.6	1.7
OG-15	3,307	1,500	72	33	606	275	6.1	1.9	2.3	0.7	2.4	0.7	5.6	1.7
OG-20	4,409	2,000	99	45	752	341	6.5	2.0	2.5	0.8	2.6	0.8	6.1	1.9
ATALAS-3	5,000	2,268	130	59	1,200	544	7.4	2.3	3.2	1.0	3.2	1.0	7.0	2.1

* Actual values for above sizes may vary +/- 15% due to variations in materials and tolerances.

OCEAN GUARD NAVIGATIONAL AND MARKER BUOYS

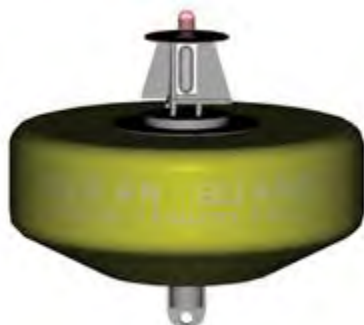

BUOY MODEL	BUOYANCY NET		BUOY WEIGHT		BUOY DIAMETER		BUOY BODY HEIGHT	
	LBS	KG	LBS	KG	FT	M	FT	M
NAV-100	221	100	194	88	3.0	0.9	2.3	0.7
NAV-200	441	200	399	181	3.8	1.2	3.0	0.9
NAV-500	1,103	500	650	295	4.9	1.5	3.0	0.9
NAV-750	1,654	750	981	445	6.7	2.0	3.3	1.0
NAV-1000	2,205	1,000	1,816	824	8.5	2.6	4.2	1.3
NAV-3000	6,615	3,000	3,112	1,412	10.0	3.0	4.5	1.4
NAV-5000	11,025	5,000	4,462	2,024	10.2	3.1	6.0	1.8
NAV-7500	16,538	7,500	6,703	3,040	11.8	3.6	6.6	2.0
NAV-10000	22,050	10,000	7,845	3,558	13.2	4.0	6.0	1.8

* Actual values for above sizes may vary +/- 15% due to variations in materials and tolerances.