


TAILGRIP OPEN WEDGE UTILITY SOCKET WITH PIN

QUENCHED AND TEMPERED CAST STEEL

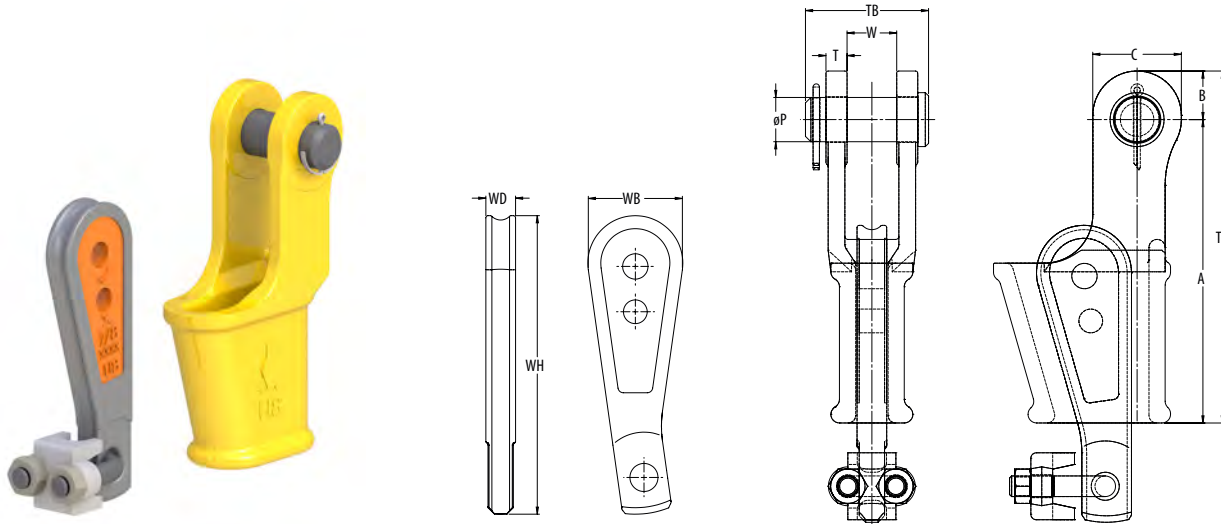

Model No.	MBL (USTons)		for wire ø		Dimensions (inch)											Weight (lbs)
			(mm)	(inch)	A	B	C	øP	T	TL	TB	W	WH	WB	WD	
OWS-U 4.10 P	■	13	10	⅜	5.75	1.06	1.94	1.00	0.50	6.81	2.93	1.00	5.99	1.91	0.44	5
OWS-U 4.11 P	■	13	11	7⁄₁₆	5.75	1.06	1.94	1.00	0.50	6.81	5.93	1.00	6.59	1.76	0.53	5
OWS-U 4.13 P	■	13	13	½	5.75	1.06	1.94	1.00	0.50	6.81	2.93	1.00	6.65	1.76	0.53	5
OWS-U 5.13 P	■	22	13	½	7.69	1.50	3.00	1.25	0.63	9.19	3.65	1.41	7.85	1.92	0.75	9
OWS-U 5.14 P	■	22	14	⅞	7.69	1.50	3.00	1.25	0.63	9.19	3.65	1.41	7.57	2.00	0.69	9
OWS-U 5.16 P	■	22	16	⅝	7.69	1.50	3.00	1.25	0.63	9.19	3.65	1.41	7.63	2.00	0.69	9
OWS-U 6.16 P	■	38	16	⅝	8.46	1.50	3.00	1.25	0.57	9.96	3.74	1.50	7.68	2.36	0.83	13
OWS-U 6.19 P	■	38	19	¾	8.46	1.50	3.00	1.25	0.57	9.96	3.74	1.50	7.68	2.36	0.83	13
OWS-U 7-22 P	■	38	22	⅞	9.63	1.63	3.26	1.25	0.66	11.26	3.25	1.31	10.59	2.12	1.06	17
OWS-U 7-26 P	■	66	26	1	9.63	1.63	3.26	1.25	0.66	11.26	3.25	1.31	10.59	1.88	1.06	17
OWS-U 8A.16 P	■	38	16	⅝	8.98	1.54	2.87	1.63	0.77	10.51	4.53	1.81	8.84	2.95	0.83	19
OWS-U 8A.19 P	■	38	19	¾	8.98	1.54	2.87	1.63	0.77	10.51	4.53	1.81	8.84	2.95	0.83	18
OWS-U 8.22 P	■	66	22	⅞	11.06	1.77	3.23	1.63	0.77	12.83	4.49	1.81	10.89	3.46	1.08	28
OWS-U 8.26 P	■	66	26	1	11.06	1.77	3.23	1.63	0.77	12.83	4.49	1.81	10.79	3.27	1.08	28
OWS-U 10.28 P	■	99	28	1⅝	13.74	2.20	4.33	1.63	0.89	15.94	4.72	1.81	13.82	4.41	1.30	53
OWS-U 10.32 P	■	99	32	1¼	13.74	2.20	4.33	1.63	0.89	15.94	4.72	1.81	13.74	4.25	1.30	53
OWS-U 11.28 P	■	99	28	1⅝	14.00	2.34	4.50	2.50	1.06	16.34	6.53	2.62	14.26	4.76	1.09	61
OWS-U 11.32 P	■	99	32	1¼	14.00	2.34	4.50	2.50	1.06	16.34	6.53	2.62	15.20	4.62	1.19	65

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. Socket range OWS 0.25 until OWS 0.5 is delivered with galvanized finish, other finishes are available upon request. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable. Meets performance requirements of API 2C.

- : Smallest wire rope size
- : Intermediate wire rope size
- : Largest wire rope size

