


SHORT BOW SOCKETS

QUENCHED AND TEMPERED CAST STEEL

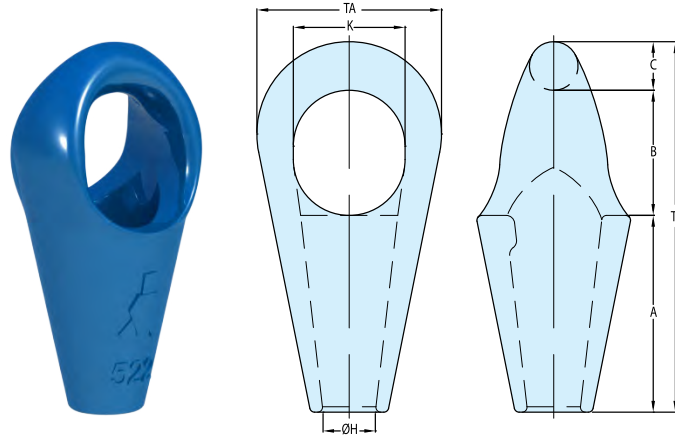

MODEL NR.	MBL (USTONS)	FOR WIRE Ø		DIMENSIONS (INCH)							WEIGHT (LBS)
		MM	INCH	A	B	C	Ø H	K	TA	TL	
SBS 512	154	31-36	1 ¼ - 1 ¾	5 ⅞	3 ¼	1 ½	1 ½	2 ⅝	5 ⅜	10 ⅝	15
SBS 517	176	37-42	1 ½ - 1 ¾	6 ¾	4 ⅞	1 ½	1 ¾	3 ⅝	6	12	22
SBS 519	220	43-48	1 ¾ - 1 ¾	7 ¾	4 ¾	1 ¾	2	4 ⅞	7	14	34
SBS 522	276	49-54	2 - 2 ⅝	8 ⅞	5 ⅞	2 ⅝	2 ¼	4 ¾	7 ⅞	15 ⅝	46
SBS 524	353	55-60	2 ¼ - 2 ¾	9 ⅞	5 ⅞	2 ¾	2 ½	5 ⅞	8 ⅞	17 ⅝	62
SBS 526	441	61-68	2 ½ - 2 ¾	10 ½	6 ½	2 ⅞	2 ⅞	5 ⅞	9 ⅞	19 ⅝	96
SBS 527	551	69-75	2 ¾ - 2 ¾	11 ⅞	7	2 ⅞	3 ⅞	6 ⅞	10 ⅞	21 ¼	118
SBS 528	661	76-80	3 - 3 ⅝	12 ¾	7 ⅞	3	3 ½	6 ⅞	11 ⅞	23 ⅞	155
SBS 529	772	81-86	3 ¼ - 3 ¾	12 ¾	8 ½	3 ¼	3 ⅞	7 ⅞	12 ⅞	24 ⅞	179
SBS 530	882	87-93	3 ½ - 3 ¾	14 ⅞	8 ⅞	3 ⅞	3 ⅞	7 ⅞	13 ¾	26 ⅞	246
SBS 531	992	94-102	3 ¾ - 4	14 ⅞	9 ¼	3 ⅞	4 ¼	8 ⅞	14 ¾	27 ⅞	287
SBS 533	1102	108-115	4 ¼ - 4 ½	16 ⅞	10 ⅞	4 ⅞	4 ¾	9 ⅞	16 ⅞	31 ½	401

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available.

All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.

