


CARGO HOISTING BLOCKS



DRILLED SWIVEL EYE (DS)

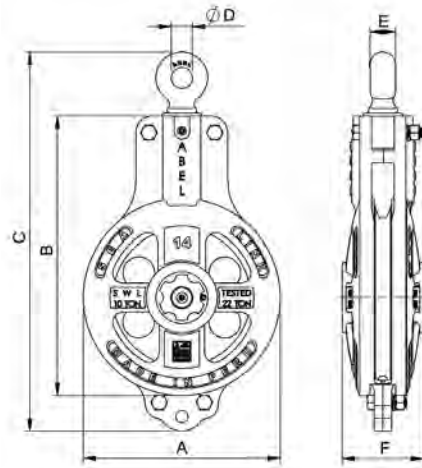


**DSS-SWIVEL EYE WITH
ANCHOR SHACKLE**

MODEL NO.	WLL LBS	WIRE ROPE	SHEAVE	DIMENSIONS (MM)							WEIGHT (LBS)
		ØR	ØS	A	B	C	ØD	E	F	G	
SL561R-12DS	11000	5/8 - 3/4	12	13.1	17.6	26.4	3.2	1.5	1.1	5.5	100
SL561R-14DS	22000	3/4 - 7/8	14	15.2	21.6	30.8	3.2	1.5	1.3	6.3	136
SL561R-16DS	22000	7/8 - 1	16	17.1	23.4	33.8	3.8	1.8	1.4	6.3	150



OBLONG SWIVEL EYE (OS)

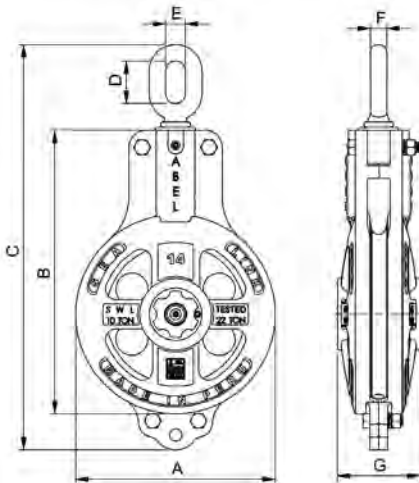

**OSS-OBLONG SWIVEL EYE
W/UPSET ANCHOR SHACKLE**

MODEL NO.	WLL LBS	WIRE ROPE	SHEAVE	DIMENSIONS (MM)						WEIGHT (LBS)
		ØR	ØS	A	B	C	D	E	F	
SL561R-12OS	11000	5/8 - 3/4	12	13.1	17.6	24.8	1.5	1.7	5.5	100
SL561R-14OS	22000	3/4 - 7/8	14	15.2	21.6	29.3	1.6	2.0	6.3	138
SL561R-16OS	22000	7/8 - 1	16	17.1	23.4	31.5	1.7	2.1	6.3	150

- Blocks built to 4:1 Design Factor.
 - Includes Timken Tapered Roller Bearings.
 - Top Fittings Available - Drilled Swivel Eye (SE), Oblong Swivel Eye (OS), plus optional as listed.
 - All accessories are forged.
 - Dimensions shown represent current models and are subject to change.
 - Blocks shown are standard models.
 - Custom models available upon request.
- See our warnings & application instructions